


## DR-SD6/12 LED Driver

### Connection Pinout

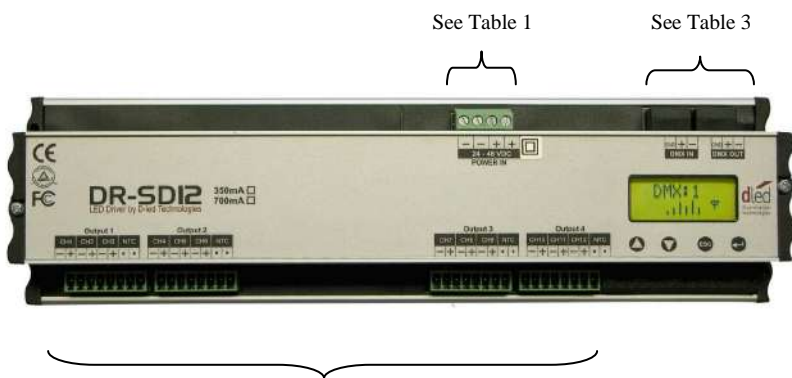

#### Power In Terminal Block

Table 1

Pin	Voltage Polarity
1	-V
2	-V
3	+V
4	+V

See Table 2

#### Output Terminal Block Pinout:

Table 2

Pin	LED polarity	Description
1	-	CH1
2	+	
3	-	CH2
4	+	
5	-	CH3
6	+	
7	Thermo	NTC
8	Thermo	

#### DMX RJ-45 Pinout:

Table 3

Pin	DMX IN Signal	DMX OUT Signal
1	-R	-T
2	+R	+T
3	GND	GND
4	N.C.	N.C.
5	+12VDC / 0.3A	N.C.
6	N.C.	N.C.
7	N.C.	N.C.
8	N.C.	N.C.

### Safety Warnings

#### ENG

1. Unit intended for maximum operating ambient 40°C.
2. Readily accessible double-pole circuit breaker (for disconnection of "+" and "-"), suitably certified in accordance with National Code and requirements and rated max. 15A shall be provided in building installation for DC mains supply disconnection.

#### FR

1. Unité destinés ambiante maximale de 40°C.
2. Facilement accessible le double disjoncteur tripolaire (pour la déconnexion de "+" et "-"), dûment certifiés conformément au Code national des exigences maximale nominale 15A doit être prévu dans la construction de l'installation de la déconnexion du réseau d'alimentation DC.