



# GINGER P

*A pending Lighting fixture spotlight for outdoor or indoor.*

	<b>CRI</b>		<b>lm</b>	<b>lm/w</b>				
IP 67	Min 90	3W	240 lm	131 lm/w	4° - 50° / Ov	2200 - 5700K	R / G / B	RAL / Anodize

**GINGER** is a line of spotlights affording a small and slick design and leading-edge technology. The series of spots includes both recessed and freestanding fixtures. **GINGER 400** is a new line of spotlights with higher light output of 460lm thanks to Luxeon 5050 Led.

Although **GINGER** is small in size (only 74mm), it affords a mighty light output of 240lm, thanks to the new Luxeon TX LED. Furthermore, GINGER's dark-light design ensures a pure light without glare.

**GINGER** has a smart design, incorporating a unique cooling method, and a concealed cable PG, to provide a slim cutout where its anodized color lends the final touch of an artist.

**GINGER P** is a spotlight for outdoor or indoor pending from the ceiling. This line is ideal for illuminating facades and niches, spas and pool areas, landscape lighting and scenery, counters and shelves, indoor and outdoor use, at home and/or in the office.



**OUTPUT**

LED System	Luxeon TX
Intensity	240 lm @ full power CRI 90 3000K
Channel Range	1 Channel
Color Range	2200 / 2700K / 3000K / 3500K / 4000K / 5000K / 5700K / 6500K / COLORS
Optical System	11° / 15° / 28° / 44° / Oval 12 * 52°

**ENVIRONMENTAL**



Control	External LED driver
Input Voltage	3V
Consumption	2.1W @ 700mA, 3.15W @1050mA
Max LED's	1 LED
Efficiency LM/W	121lm/w
Connection	22AWG 2C Concealed cable PG

**PHYSICAL**

IP Rating	IP 67
Working Temp.	-18°C ~ 40°C / 0°F ~ 104°F
Storage Temp.	-18°C ~ 60°C / 0°F ~ 140°F

**PHYSICAL**

Size	H74mm * Ø36mm
Housing	Aluminum Anodize

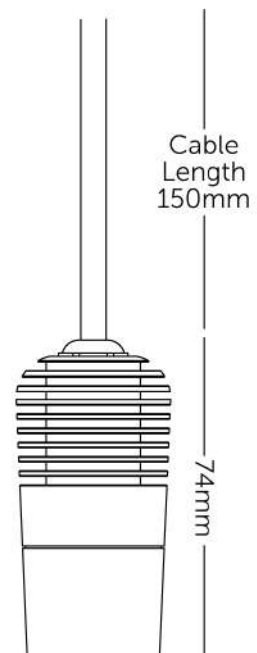

Hobeycomb

**TECHNICAL SPECIFICATION**