







GINGER XL-T

*Big size recessed spotlight for installations
into drywall / wood panels.*

| | | | | | | | | | |
|--|------------|---|-----------|-------------|---|---|---|---|---|
|  | CRI |  | lm | lm/w |  |  |  |  |  |
| IP 67 | 70-90 | 8.4W | 934lm | 111lm/w | 9/20/28/37/ OV | 2700K ~ 6500K | Mono / RGBW | RAL / Anodize | 70mm |

GINGER XL is a line of spotlights designed with leading-edge technology. The series of spots includes various installation options with a custom design mounting system. The light output of the unit ranges from 860 to 1130 Lumen thanks to the Luxeon 7070 LED. Furthermore, the unit's dark-light design ensures pure light without glare.

GINGER XL has a smart design, incorporating a unique cooling method, and a concealed cable PG, to provide a slim cutout where its anodized color lends the final touch of an artist. The **GINGER XL** is also optional in RGBW.

Ginger XL T is a bigger size recessed spotlight for installations into drywall or wood panels. This line is ideal for illuminating facades and niches, spas and pool areas, landscape lighting and scenery, counters and shelves, indoor and outdoor use, at home and/or in the office.

Ginger XL T has a tilt angle of up to 35° in each direction.



OUTPUT

| | |
|----------------|--|
| LED System | Luxeon 7070 |
| Intensity | 934 lumens @ full power CRI 80 3000K |
| Channel Range | 1 / 4 Channels |
| Color Range | 2200K / 2700K / 3000K / 3500K / 4000K / 5000K / 5700K / 6500K / RGBW |
| Optical System | 9 / 20 / 30 / 40 / OVAL 42X20 |

ENVIRONMENTAL




| | |
|-----------------|---|
| Control | Constant current driver / 24V with Mini CC2CB |
| Input Voltage | 12V/700mA |
| Consumption | 8.4W |
| Max LED's | 1 LED |
| Efficiency LM/W | 111lm/w @ 3000K 80CRI @ 700mA |
| Connection | 22AWG 2C concealed cable PG |

PHYSICAL

| | |
|---------------|-----------------------------|
| IP Rating | IP 67 |
| Working Temp. | -18°C ~ 40°C / 0°F ~ 104°F |
| Storage Temp. | -18°C ~ 60°C / 0°F ~ +140°F |

PHYSICAL

| | |
|---------|-----------------------------------|
| Size | H106 * Ø84mm |
| Housing | Anodize Aluminum & powder coating |

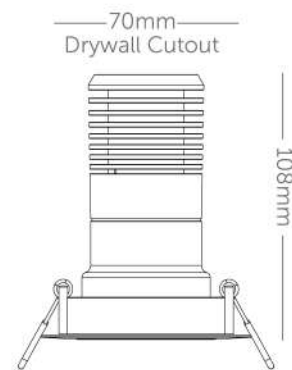

TECHNICAL SPECIFICATION