



# ***SPICE RECESSED***


*Light fixture designed for indoor recessed applications.*

**SPICE** system introduces an innovative approach to lighting design and energy efficiency. With a variety of high quality optics to choose from, and the flexibility to choose the desired length and light output of each run.

**SPICE** has an impressive Max. Efficiency of 153lm/w (4000K/80CRI) and wide range of optics to suite most design needs. Units are seamlessly joined to create a continues lighting effect.

**SPICE** is designed for Indoor applications. Its small size makes it ideal for shops, hotels, public buildings, museums etc. It is available in 1 or 2 channels and wide range of color temperatures.

**SPICE RECESSED** is a Ceiling recessed Light fixture for installations into drywall or wood panels. It comes in 4 different lengths and is cleverly designed to maintain output regardless of the number of units connected together making large scale system installation simple and very cost effective.

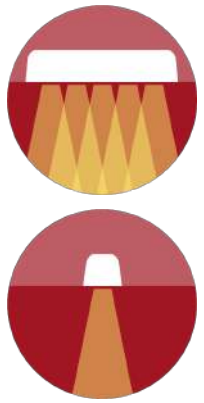

		<b>CRI</b>		<b>lm</b>	<b>lm/w</b>				
52mm	IP 20	70-90 CRI	35W/Meter	5360lm	153 lm/W	Mide / Wide / OV / WG	2200 - 6500K	Monochrom	RAL / Anodize

**OUTPUT**

LED System	Luxeon 3030 2D Mid Power LED
Intensity	5360 Lumen per Meter / CRI 80 / 4000K / 700mA
Channel Range	1 / 2 Channel
Color Range	2200K / 2700K / 3000K / 3500K / 4000K / 5000K / 5700K / 6500K
Optical System	Double Asymmetric (for aisle and shelf lighting) / Asymmetric (WG) / Asymmetric (WW) / Oval 93+34 / Oval 57+114 / Oval 88+108

**ELECTRICAL**


Control	External constant current driver
Input Voltage	42V
Consumption	35W Per Meter
Max LED's	56 LEDs @ 114cm
Efficiency LM/W	153 LM/M
Connection	2 * 20 AWG

**ENVIRONMENTAL**

IP Rating	IP20 / IP43
Working Temp.	-20°C ~ 40°C / -4°F ~ 104°F
Storage Temp.	-20°C ~ 50°C / -4°F ~ 122°F

**PHYSICAL**

Size	Variable * H31mm * W59mm cutout w52mm
Housing	Aluminum Anodize

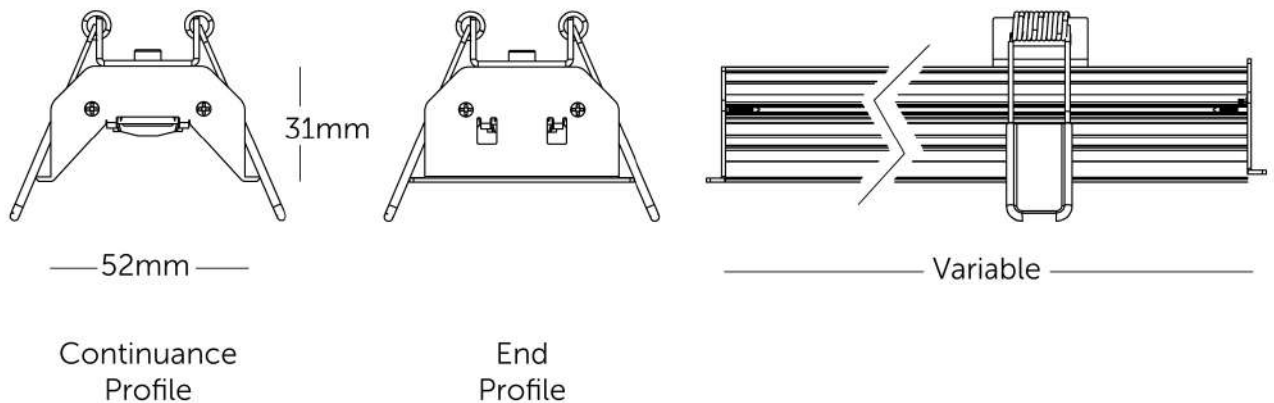


**FIXTURE LENGTH**


Length of Run	Number of LEDs	2200k	2700k	3000k	4000k	6500k	Watt	Watt per Meter
289mm	14	1210	1390	1440	1530	1500	10	
572mm	28	2420	2780	2880	3060	3000	20	
1144mm	56	4840	5560	5760	6120	6000	40	35
1716mm	84	7260	8340	8640	9180	9000	60	
2288mm	112	9680	11120	11520	12240	12000	80	

\* Lumens Output @ 120mA

**ACCESSORIES**

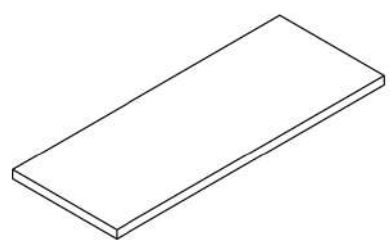

Frosted PC Cover

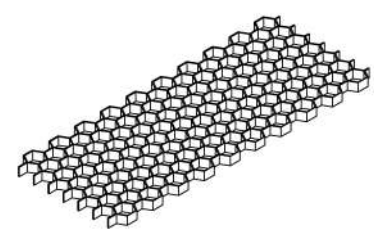

Honeycomb

**PINOUT**

